

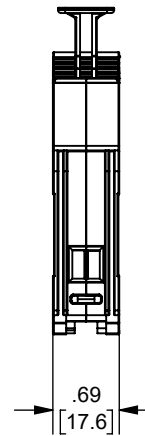



REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
A	9/18/2024	N/A	INITIAL RELEASE	YF	N/A	N/A

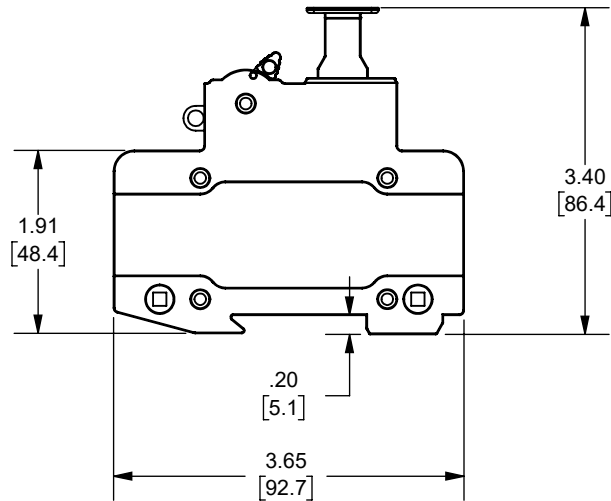

1 POLE

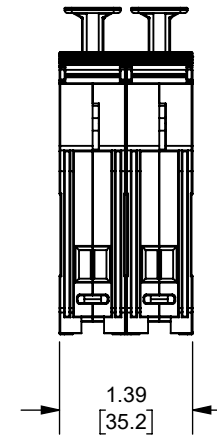

2 POLE

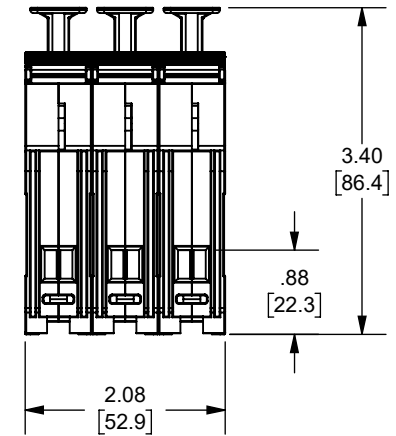

3 POLE

NOTES:

1. AGENCY INFORMATION:

UL FILE No. E191605
cULus - UL98
COMPLAINT TO IEC 60529,IP20

2. MATERIALS

INSULATOR - THERMOPLASTIC
TEMP. RATING 130°C (266°F)
FLAMABILITY UL94 V-0

FUSECLIP & BUSSES - PLATED COPPER

SPRINGS & SCREWS - PLATED STEEL

3. TERMINATION

LINE: 18 - 4 AWG
LOAD: 18- 4 AWG

4. RATINGS


MAX AMP PER POLE - 30A
BASED ON NEC WIRE RATINGS CODE,
75° C WIRE
200kA INTERRUPT RATING

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

DIMENSIONS IN []
ARE MILLIMETERS

Approval stage / Etat d'approbation: APPROUVÉ POUR FABRICATION / APPROVED FOR MANUFACTURING		Product Class:/ Product Type: DISCONNECT SWITCH COMPACT FUSED SWITCH	
Initial ECO / ECO intiale:		Product amp rating:/ Voltage rating: 30A 600V	
Draw by / Dessiné par: Yadyra Fang	Date : 9/26/2024	Title / Titre: OUTLINE	
Checked by / Vérifié par: Luis ARMENTA	Date : 9/26/2024		
Electrical Power 374 MERRIMAC STREET NEWBURYPORT,MA 01950		Drawing / de dessin: OUT-1213619	
Éch / Scale : 1:2 Format / Size : A		Part / Article: SEE TABLE	Page : 1/1

Weight :
Masse :



Rev :
Rév : **A**

MERSEN

Ce plan strictement confidentiel est la propriété exclusive de la société MERSEN sans l'autorisation écrite de laquelle il ne peut être ni reproduit, ni copié, ni communiqué à des tiers.
This drawing and specifications there on is property of MERSEN and shall not be reproduced or copied or used in whole or in part as the base for manufacture or sale of item without written permission.

CEP-FS30CC3
CEP-FS30CC2
CEP-FS30CC1
CATALOG
NUMBER